

100 916
 500 100
 100 916
 500 100

FIG. 1


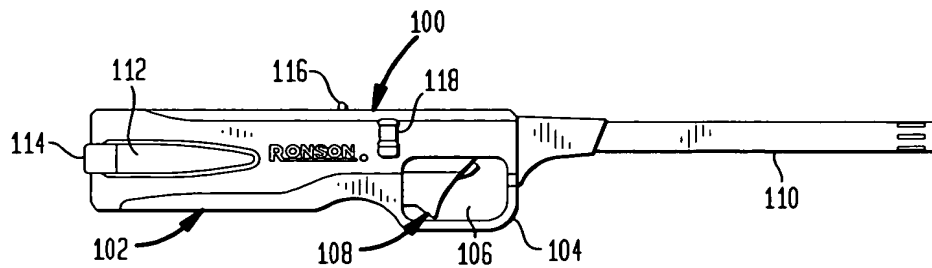



FIG. 2



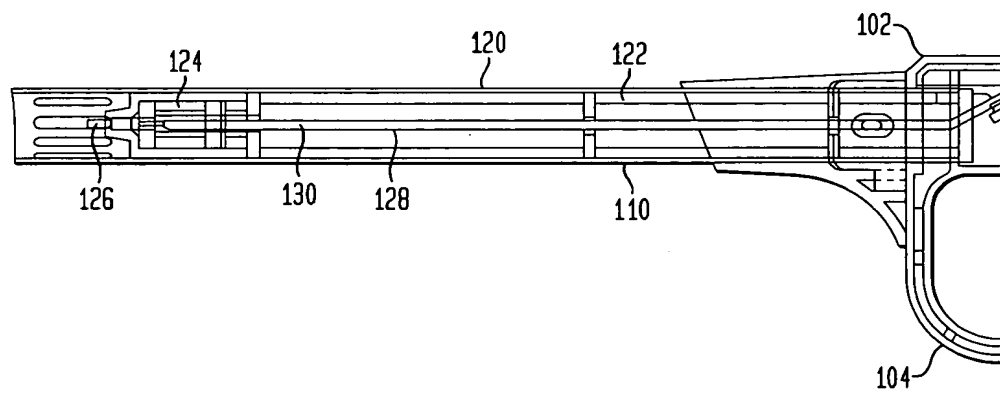

2/10

FIG. 3

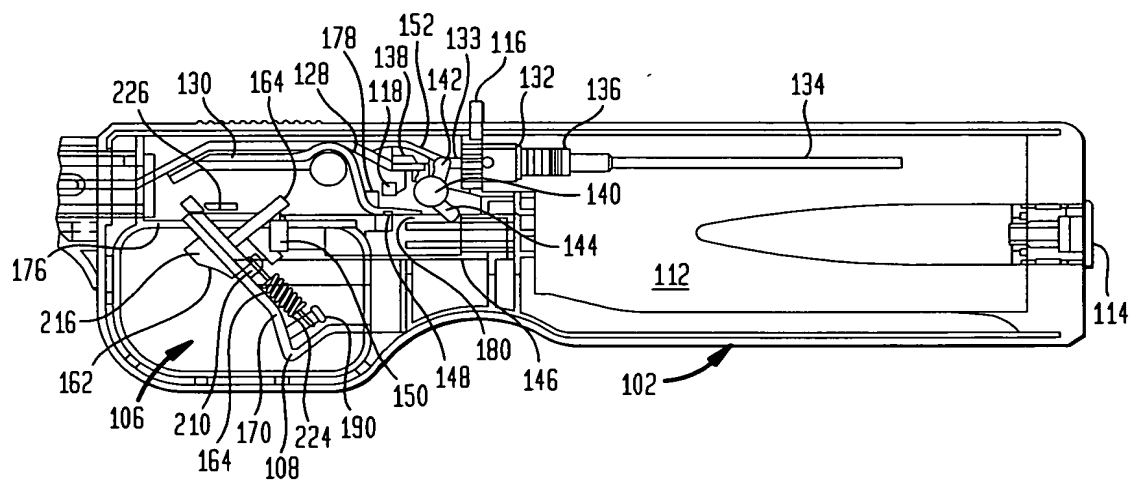

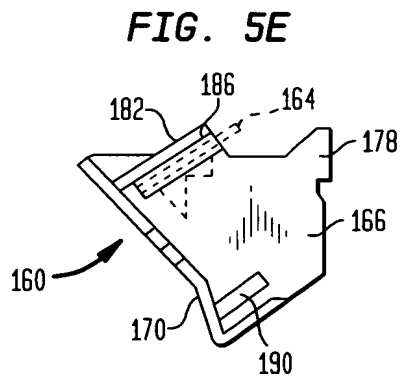
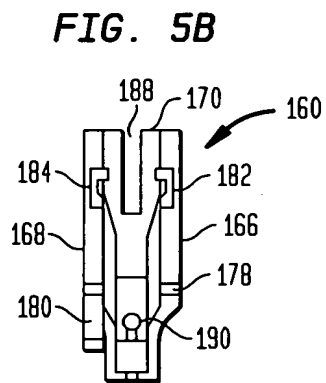
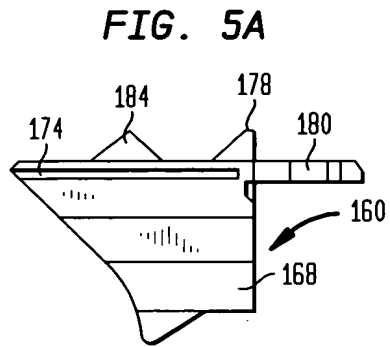






FIG. 5C

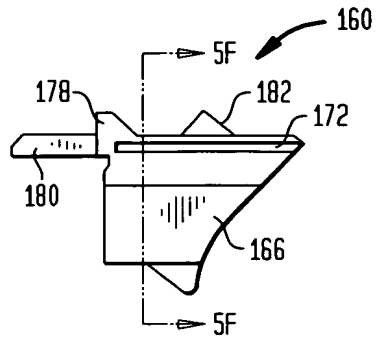


FIG. 5D




FIG. 5F




FIG. 6A




FIG. 6B

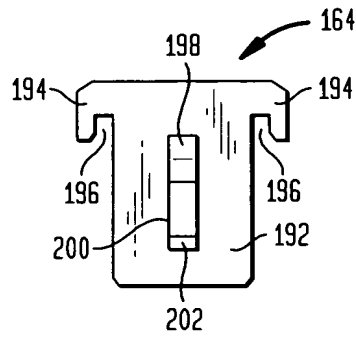




FIG. 7A

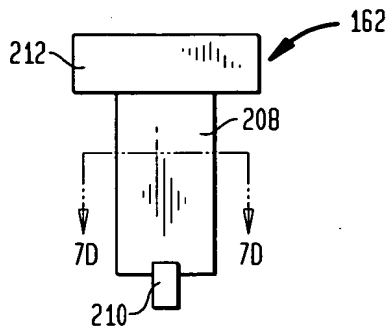


FIG. 7B




FIG. 7C


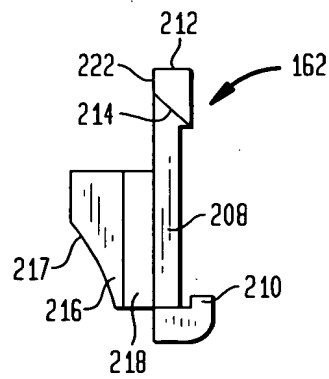


FIG. 7D





6/10

FIG. 8A



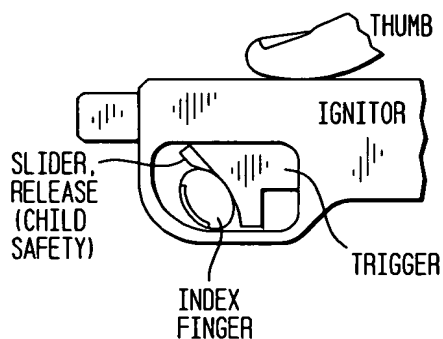


FIG. 8B

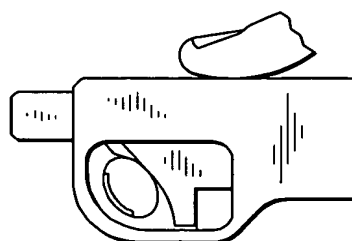


RELEASE CHILD SAFETY BY LIFTING THE SPRING LOADED SLIDER UP USING INDEX FINGER

FIG. 8C

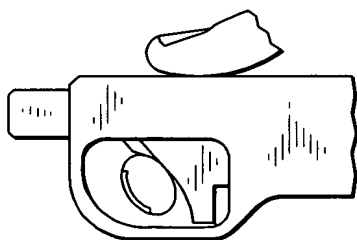

WHILE HOLDING CHILD SAFETY RELEASE SLIDER UP, SQUEEZE TRIGGER TO LIGHT IGNITOR

FIG. 8D



IGNITOR AT REST WITH CHILD SAFETY RESET AND IGNITOR SHUT OFF

FIG. 9B

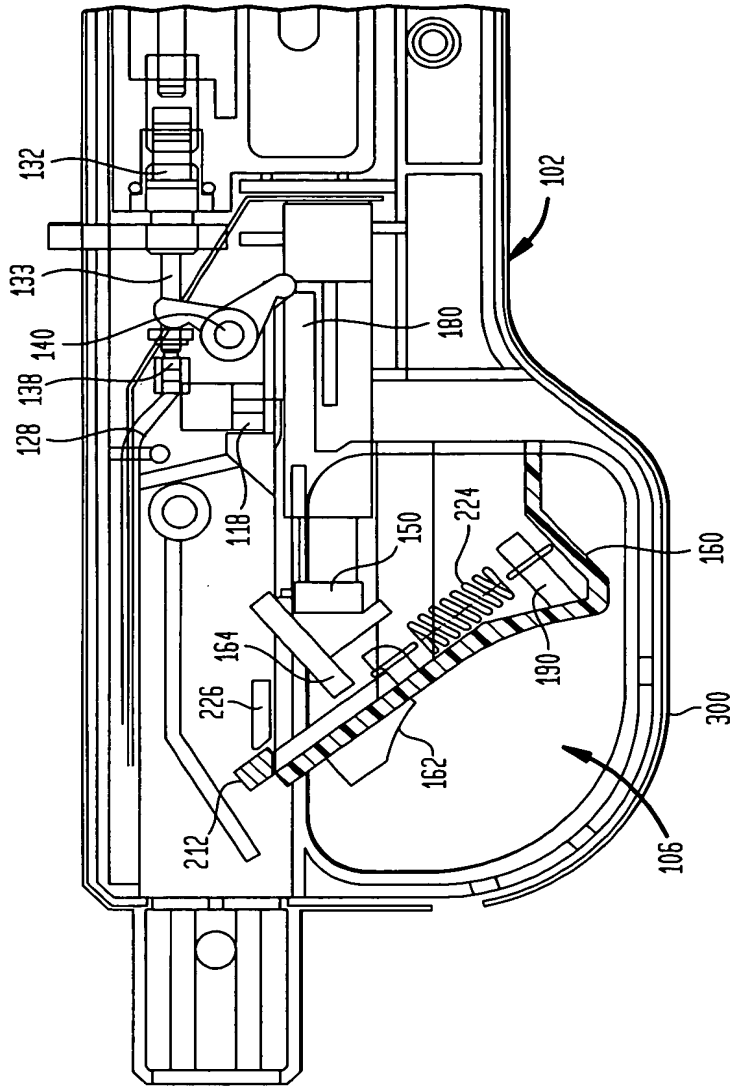


FIG. 9A

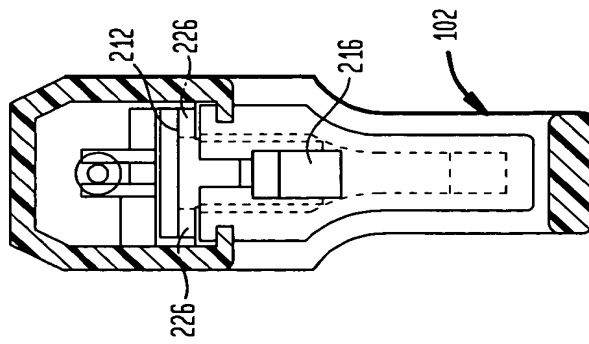


FIG. 10B

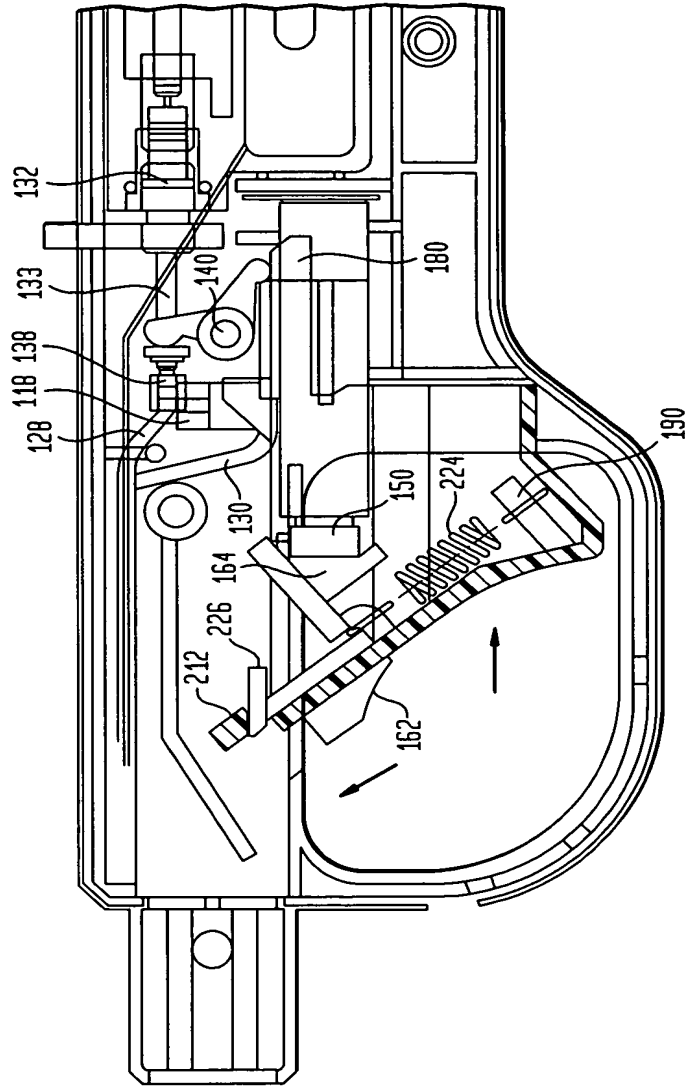


FIG. 10A

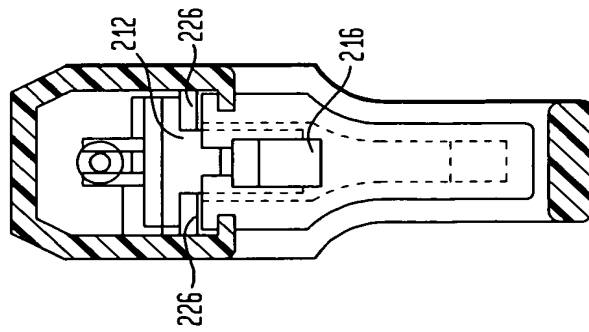




FIG. 11

